

TE'S CROMPTON INSTRUMENTS INSTRUMENT SELECTOR SWITCHES

Application

- Ammeter Switches
- Voltmeter Switches

Benefits

- Cost effective
- Easy to install
- High protection class

Features

- Compact size
- Reliable design
- Multi pole


Approvals

- IEC EN 60947-3
- VDE 0660 part 107

TE's Crompton Instruments Panel Mounted Selector Switches are available as a 4 and 7 position Voltmeter switch, or as a 4 and 5 position Ammeter switch.

A reliable switch that is easy to use, can be used along side the TE's Crompton Instruments Standard Analogue and Voltmeters range.




Each switch is supplied with numbered annotation (L1, L2, L3) as standard, or coloured annotation is available (RYB) on request.

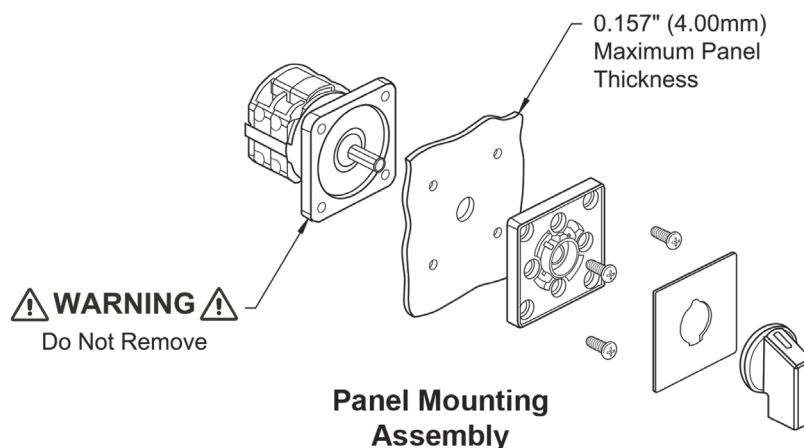

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.



ROTARY CAM SWITCHES DIMENSIONAL DETAILS

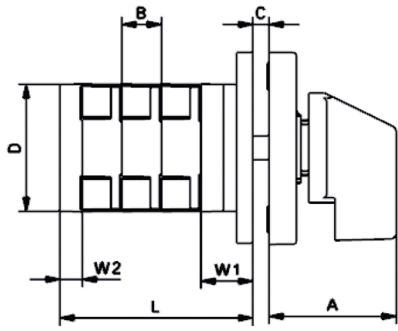

Length (L) = No. of Stages of Prog x B + W1 + W2


Drilling Plane

Type	A	B	C (max)	D	M1	M2	M3	R	S	W1	W2
6A	29 (1.14")	9.7 (0.382")	4 (0.157")	32 (1.26")	36 (1.417")	4 (0.157")	8 (0.315")	48 (1.89")	48 (1.89")	13 (0.512")	7 (0.276")
10A	29 (1.14")	9.5 (0.374")	4 (0.157")	43 (1.693")	36 (1.417")	4 (0.157")	7 (0.276")	60 (2.362")	48 (1.89")	19 (0.748")	5 (0.197")
16A	29	9.5	4	43	36	4	7	60	48	19	5

DESCRIPTION

CURRENT RATING


Ammeter Selector Switch 5 Position
 Line Current with OFF with Neutral

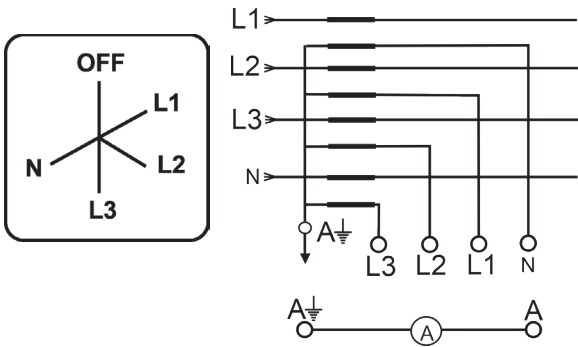

6A	10A	16A
SWA-5P-6A	SWA-5P-10A	SWA-5P-16A

OUTPUT SIDE	A1	A2				
INPUT SIDE	L1	L2	L3	N		
OFF						
L1	X		X	X		X
L2		X	X	X		X
L3		X	X	X		X
N	X	X	X	X	X	X

Ammeter Selector Switch 4 Position
 Line Current with OFF

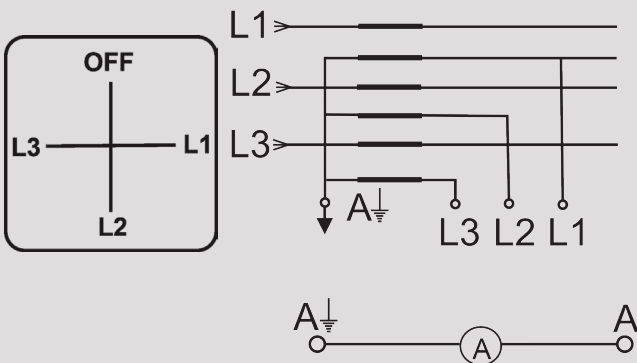

SWA-4P-6A	SWA-4P-10A	SWA-4P-16A

OUTPUT SIDE	V1	V2				
INPUT SIDE	N	L1	N	L2	N	L3
OFF						
L1L2	X	X				
L2L3			X	X		
L3L1					X	X

DESCRIPTION	CURRENT RATING																																																														
	6A	10A	16A																																																												
<p>Voltmeter Selector Switch 4 Position Voltage between Phases with OFF</p>	<p>SWV-4P-6A-LL</p>	<p>SWV-4P-10A-LL</p>	<p>SWV-4P-16A-LL</p>																																																												
	<table border="1"> <thead> <tr> <th>OUTPUT SIDE</th> <th>V2</th> <th>V1</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>INPUT SIDE</th> <th>L1</th> <th>L2</th> <th>L3</th> <th></th> <th></th> </tr> <tr> <td>OFF</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>L1L2</td> <td>X</td> <td></td> <td>X</td> <td></td> <td></td> </tr> <tr> <td>L2L3</td> <td></td> <td>X</td> <td></td> <td></td> <td>X</td> </tr> <tr> <td>L3L1</td> <td></td> <td>X</td> <td></td> <td>X</td> <td></td> </tr> </tbody> </table>			OUTPUT SIDE	V2	V1										INPUT SIDE	L1	L2	L3			OFF						L1L2	X		X			L2L3		X			X	L3L1		X		X																			
OUTPUT SIDE	V2	V1																																																													
INPUT SIDE	L1	L2	L3																																																												
OFF																																																															
L1L2	X		X																																																												
L2L3		X			X																																																										
L3L1		X		X																																																											
<p>Voltmeter Selector Switch 7 Position Voltage between Phases & Individual Phase to Neutral with OFF</p>	<p>SWV-7P-6A</p>	<p>SWV-7P-10A</p>	<p>SWV-7P-16A</p>																																																												
	<table border="1"> <thead> <tr> <th>OUTPUT SIDE</th> <th>V2</th> <th>V1</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>INPUT SIDE</th> <th>L3</th> <th>L2</th> <th>L1</th> <th>N</th> <th></th> </tr> <tr> <td>L3L1</td> <td>X</td> <td></td> <td>X</td> <td></td> <td></td> </tr> <tr> <td>L2L2</td> <td>X</td> <td>X</td> <td></td> <td></td> <td></td> </tr> <tr> <td>L1L2</td> <td></td> <td></td> <td>X</td> <td>X</td> <td></td> </tr> <tr> <td>OFF</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>L1N</td> <td></td> <td></td> <td></td> <td>X</td> <td>X</td> </tr> <tr> <td>L2N</td> <td></td> <td>X</td> <td></td> <td></td> <td>X</td> </tr> <tr> <td>L3N</td> <td>X</td> <td></td> <td></td> <td></td> <td>X</td> </tr> </tbody> </table>			OUTPUT SIDE	V2	V1										INPUT SIDE	L3	L2	L1	N		L3L1	X		X			L2L2	X	X				L1L2			X	X		OFF						L1N				X	X	L2N		X			X	L3N	X				X
OUTPUT SIDE	V2	V1																																																													
INPUT SIDE	L3	L2	L1	N																																																											
L3L1	X		X																																																												
L2L2	X	X																																																													
L1L2			X	X																																																											
OFF																																																															
L1N				X	X																																																										
L2N		X			X																																																										
L3N	X				X																																																										
<p>Voltmeter Selector Switch 4 Position Phase to Neutral Voltages with OFF</p>	<p>SWV-4P-6A-LN</p>	<p>SWV-4P-10A-LN</p>	<p>SWV-4P-16A-LN</p>																																																												
	<table border="1"> <thead> <tr> <th>OUTPUT SIDE</th> <th>V2</th> <th>V1</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <th>INPUT SIDE</th> <th>L1</th> <th>L2</th> <th>L3</th> <th></th> <th></th> </tr> <tr> <td>OFF</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>L1L2</td> <td>X</td> <td></td> <td>X</td> <td></td> <td></td> </tr> <tr> <td>L2L3</td> <td></td> <td>X</td> <td></td> <td></td> <td>X</td> </tr> <tr> <td>L3L1</td> <td></td> <td>X</td> <td></td> <td>X</td> <td></td> </tr> </tbody> </table>			OUTPUT SIDE	V2	V1										INPUT SIDE	L1	L2	L3			OFF						L1L2	X		X			L2L3		X			X	L3L1		X		X																			
OUTPUT SIDE	V2	V1																																																													
INPUT SIDE	L1	L2	L3																																																												
OFF																																																															
L1L2	X		X																																																												
L2L3		X			X																																																										
L3L1		X		X																																																											

About TE Connectivity

TE Connectivity Ltd. (NYSE: TEL) TE Connectivity is a \$12 billion global technology leader. Our commitment to innovation enables advancements in transportation, industrial applications, medical technology, energy, data communications, and the home. TE's unmatched breadth of connectivity and sensor solutions, proven in the harshest of environments, helps build a safer, greener, smarter and more connected world. With 75,000 people – including more than 7,000 engineers – working alongside customers in nearly 150 countries, we help ensure that EVERY CONNECTION COUNTS.

WHEREVER ELECTRICITY FLOWS, YOU'LL FIND TE ENERGY



crompton-instruments.com

For email or phone, go to:

crompton-instruments.com

FOR MORE INFORMATION: TE Technical Support Centres

UK +44 1376 509 401
USA: +1 800 327 6996
Australia +61 1300 656 090
Singapore +65 6590 5151
Hong Kong: +852 2738 8193



crompton-instruments.com

© 2018 TE Connectivity Ltd. All Rights Reserved. EPP-

TE, TE Connectivity, the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Crompton is a trademark of Crompton Parkinson and is used under a licence. Other logos, product and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.