



CROMPTON INSTRUMENTS INTEGRA DIGITAL METERING SYSTEMS

INTEGRA DIGITAL METERING SYSTEMS



Features

- Measurement, display and communication of electrical and power parameters
- High contrast LED or LCD display
- THD measurement and power quality data to 31st harmonic
- True rms and average sensing measurement
- Pulsed, analogue and digital outputs
- Modbus RTU RS485 protocol, Johnson Controls and Lonworks protocol interface options
- Fully programmable VT and CT ratios

Benefits

- Pre-calibrated plug-in options
- Simple menu driven interface
- Remote monitoring
- True three-and four-wire measurement

Applications

- Switchgear
- Distribution systems
- Generator sets
- Control panels
- Energy management
- Utility power monitoring
- Motor monitoring
- Ground power units

The Integra digital metering product portfolio offers an extensive range of systems designed to suit any power monitoring application.

Integra digital metering systems (dms) provide fully programmable, highly accurate measurement, display and communication of all major electrical and power quality parameters, including true rms system values, power quality data and measurement of total harmonic distortion. Designed to meet customer requirements, the Integra digital metering portfolio offers optional pulsed, analogue and digital communication outputs, DIN or ANSI case styles and high quality LED or LCD displays.

Contents continued

DIN Integra Metering Specification Overview	1
Integra Ci3 Digital Metering System	2 - 3
Integra Ri3 Digital Metering System.....	4 - 5
Integra Ri4 Digital Metering System	6 - 7
Integra 1630 Digital Metering System.....	8 - 11
Integra 1530 Digital Metering System.....	12 - 15
Integra 1540 Digital Metering System	16 - 18
Integra Communication and Configuration Software	19

DIN INTEGRA DIGITAL METERING SPECIFICATION OVERVIEW



	Integra Ci3	Integra Ri3	Integra Ri4	Integra 1630	Integra 1530	Integra 1540
96mm (3.78") x 96mm (3.78")	✓			✓	✓	
Din-rail mounting 72 x 91 mm		✓	✓			
ANSI 110mm (4.31") x 110mm (4.31")						✓
IP54 protection	✓			✓	✓	✓
Single-phase system	✓	✓		✓	✓	
Single-phase 3-wire system					✓	
3-phase 3-wire system	✓	✓		✓	✓	✓
3-phase 4-wire system	✓	✓	✓	✓	✓	✓
3-phase 4-wire with neutral CT					✓	
3-line 4-digit LCD display	✓	✓	✓			
3-line 4-digit LED display				✓	✓	✓
Programmable VT ratios				✓	✓	✓
Programmable CT ratios	✓	✓		✓	✓	✓
Measured parameters						
Voltage line-to-line	✓	✓	✓	✓	✓	✓
Voltage line-to-neutral (4 wire system)	✓	✓	✓	✓	✓	✓
System voltage	✓	✓	✓	✓	✓	✓
Current L1, L2, L3	✓	✓	✓	✓	✓	✓
System current	✓	✓	✓	✓	✓	✓
Neutral current calculated	✓	✓	✓	✓	✓	✓
Neutral current measured					✓	
Frequency 45-66Hz	✓	✓	✓	✓	✓	✓
Demand current	✓	✓	✓	✓	✓	✓
Max demand current	✓	✓	✓	✓	✓	✓
Demand active power	✓	✓	✓	✓	✓	✓
Max demand active power	✓	✓	✓	✓	✓	✓
Power factor	✓	✓	✓	✓	✓	✓
Active power kW	✓	✓	✓	✓	✓	✓
Reactive power kVAr	✓	✓	✓	✓	✓	✓
Apparent power kVA	✓	✓	✓	✓	✓	✓
kW demand	✓	✓	✓	✓	✓	✓
Active energy kWh import	✓	✓	✓	✓	✓	✓
Reactive energy kVArh import	✓	✓	✓	✓	✓	✓
Active energy kWh export	✓	✓	✓	✓	✓	✓
Reactive energy kVArh export	✓	✓	✓	✓	✓	✓
Voltage % THD average	✓	✓	✓	✓	✓	✓
Voltage % THD L1, L2, L3	✓	✓	✓	✓	✓	✓
Current % THD average	✓	✓	✓	✓	✓	✓
Current % THD L1, L2, L3	✓	✓	✓	✓	✓	✓
Hours run				✓		
Communication options						
Digital RS485 Modbus RTU	✓	✓	✓	✓	✓	✓
BACnet IP				✓		
BACnet MSTP				✓		
Modbus TCP				✓		
Pulsed output	✓	✓		✓		✓
Analogue outputs					✓	
Lonworks protocol					✓	
Johnson Controls Metasys NII				✓	✓	✓
Profibus™				✓		
Standards Compliant with						
EN 61326-1	✓	✓		✓	✓	
EN 61010-1	✓	✓		✓	✓	
EN 62053-21	✓	✓				
RoHS Compliant	✓	✓	✓	✓	✓	✓
Approvals						
UL LISTED, UL 61010B-1, E203000					✓	✓

INTEGRA CI3 DIGITAL METERING SYSTEM



Easy 'clip-in' mounting

Features

- DIN 96 enclosure
- Backlit LCD screen
- Bezel depth 6.1mm
- Plug-in output modules
- Programmable CT ratio
- True rms measurement
- User programmable system configuration

Benefits

- Cost effective
- Intuitive navigation
- Crompton renowned quality
- UK manufactured
- Easy 'clip-in' panel mounting

Standards

- IEC 61326
- IEC 61010-1
- IEC 62053-21
- RoHS compliant



The Integra Ci3 meter is an accurate and cost effective solution for measurement and display of all major electrical and power quality parameters with easy programming, mounting and user friendly navigation.

The product features a DIN 96 panel mounted enclosure, backlit LCD display and user programmable CT ratios, all accessible via an intuitive user interface. Integra Ci3 dms measures 17 electrical parameters including total harmonic distortion (THD) measurement up to the 31st harmonic.

Programmable Functions

Integra Ci3 dms is programmable to suit single-phase, three-phase three-wire and three-phase four-wire system configurations. Programmable CT ratios enable to display any current range.

Display

The 15 screens are accessible via four buttons on the front panel allowing to scroll between various screens for simple and user-friendly navigation.

Plug-in Modules

Two output options ports at the rear of the product allow to fit either pulsed relay or communication modules, e.g. Modbus RTU RS485 protocol communication output.

Panel Mounting

Integral retention clips allow fast, safe and secure panel mounting in various material thicknesses without the need for external screws or clips.



Product Code

Description	Part number
Integra Ci3 base unit	CI3-01
Options Pulsed output	CI-PUL-01
Modbus RTU RS485 protocol	CI-MOD-01
Accessories IP65 protective cover	3 G365 02
IP54 panel gasket	3 C345 01


Programmable Parameters

Parameter	Range
Password:	4-digit 0000-9999
System configuration:	1-phase 2-wire, 3-phase 3-wire, 3-phase 4-wire
CT primary current:	Maximum 9999A **
Demand integration time:	OFF 5, 8, 10, 15, 20, 30, 60 minutes
3 independent resets:	Demands and maximum demands
Energy registers:	Kilo or mega
Pulse output allocation:	None, kWh or KVARh
Pulse output duration:	60, 100, 200 milliseconds
Pulse rate divisors:	0.1, 1, 10, 100, 1000
RS485 baud rate:	2.4, 4.8, 9.6, 19.2, 38.4 kBd
RS485 parity and stop bits:	Odd or even with 1 stop bit or no parity with 1 or 2 stop bits
Comms Address:	1-247
Floating point:	Normal or Reverse

Dimensions

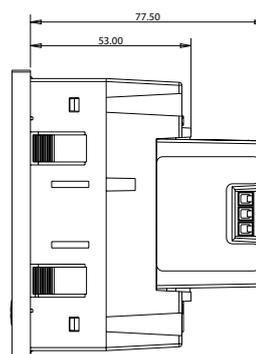

Panel cut-out






Button	Screen	Parameters
V/Hz	1	Volts L1 - N Volts L2 - N Volts L3 - N
	2	Volts L1 - L2 Volts L2 - L3 Volts L3 - L1
	3	Frequency
	4	Volts L1 - N THD% Volts L2 - N THD% Volts L3 - N THD%
	5	Volts L1 - L2 THD% Volts L2 - L3 THD% Volts L3 - L1 THD%
A	1	Current L1 Current L2 Current L3
	2	Neutral Current
	3	L1 Current Max Demand L2 Current Max Demand L3 Current Max Demand
	4	Neutral Current Max Demand
	5	Current L1 THD% Current L2 THD% Current L3 THD%
P/PF	1	kW kVAr kVA
	2	kW Max Demand
	3	Power Factor
E	1	kWh
	2	kVArh

Specifications


Input	
Nominal input voltage	100-289V AC L-N (173-500V AC L-L)
Max. cont. input overload voltage	120% of nominal
Max. short duration	2 x range maximum (1 second application input voltage repeated 5 times at 5 minute intervals)
Nominal input voltage burden	< 0.2VA per phase
Nominal input current	5A AC rms
Max. cont. input overload current	120% of nominal
Max. short duration current	10 x nominal (1 second application repeated 5 input times at 5 minute intervals)
Frequency	45-66Hz
Auxiliary Operating range	110-400V AC nominal +/-10% (99-440V AC absolute limits) or 120-350V DC +/-20% (96-420V DC absolute limits)
Accuracy Voltage (V)	0.5%
Current (A)	0.5%
Neutral current calculated (A)	4%
Frequency (Hz)	0.1 Hz
Power factor (PF)	1% of unity
Active power (W)	+/- 1% of range
Reactive power (VAr)	+/- 1% of range
Apparent power (VA)	+/- 1% of range
Active energy (kWh)	Class 1 (IEC 62053-21)
Reactive energy (kVArh)	+/- 1% of range
THD	1% up to 31st harmonic
Response time	1 sec
Output modules (optional)	
Pulsed output relays	1 per module (2 modules fitted per Ci3)
Contact rating	50mA max at 250V AC
Type	Solid state relay
Modbus RTU RS485 Protocol output module	1 Modbus RTU RS485 Protocol channel per module (maximum of 1 module fitted per Ci3)
Type	2-wire half duplex
Baud rate	2400, 4800, 9600, 19200, 38400
Enclosure	
Enclosure style	DIN 96 panel mount
Panel cut-out	92x92mm
Panel thickness	1-5mm (1-3mm when used with IP65 cover)
Front protection rating	IP52
Case protection rating	IP30
Material	Polycarbonate to UL94V0
Weight	Ci3, 260g, Modbus 40g, pulsed 20g
Terminals	Shrouded screw-clamp 0.05-4mm wire
Environment	
Operating temperature	-10°C to +55°C
Storage temperature	-20°C to +70°C
Relative humidity	0-90% non-condensing
Shock	30g in 3 planes
Vibration	10Hz to 50Hz
Dielectric voltage	Withstand test 3.25kV rms 50Hz for 1 minute between comms and measuring inputs, comm and aux, aux and measuring inputs

Connection


1-Phase 2-Wire

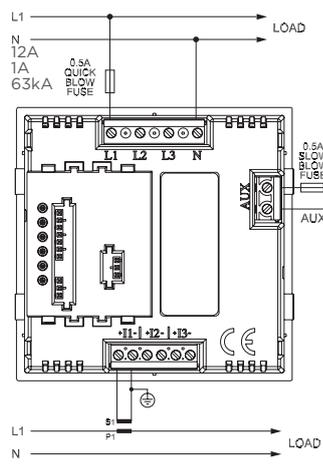


3-Phase 3-Wire

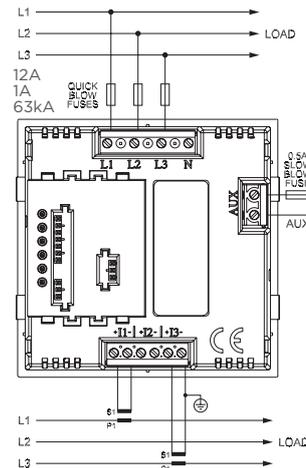

3-Phase 4-Wire

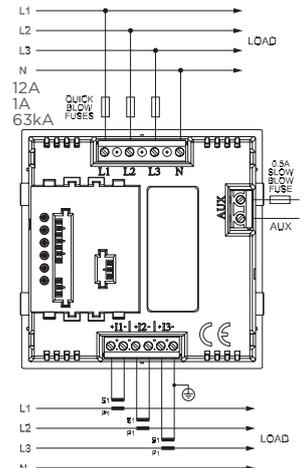

OPTION MODULES (When Fitted)

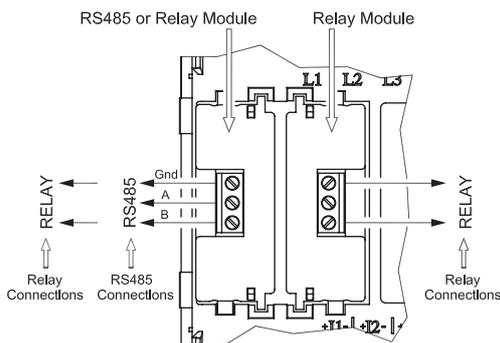

INTEGRA RI3 DIGITAL METERING SYSTEM



Features

- DIN-rail enclosure DIN 43880
- Backlit LCD screen
- Programmable CT ratio
- True rms measurement
- User programmable system configuration
- Pulsed output and Modbus RTU RS485 protocol as standard

Benefits

- Cost effective
- Simple navigation
- Crompton renowned quality
- UK manufactured

Standards

- IEC 61326
- IEC 61010-1
- IEC 62053-21



The Integra Ri3 dms is an accurate and cost effective solution for measurement and display of all major electrical and power quality parameters with easy programming and user friendly navigation in DIN 43880 enclosure.

The product features a DIN-rail enclosure, backlit LCD display and user programmable CT ratios, all accessible via an intuitive user interface. Integra Ri3 dms measures 17 electrical parameters including total harmonic distortion (THD) measurement up to the 31st harmonic.

Programmable Functions

Integra Ci3 dms is programmable to suit single-phase, three-phase three-wire and three-phase four-wire system configurations. Programmable CT ratios enable to display any current range.

Display

The parameters can be viewed on a backlit LCD display. The 15 screens are accessible via four buttons on the front panel allowing to scroll between various screens making the navigation very user-friendly, intuitive and above all - simple.

Output

Modbus RTU RS485 protocol and pulsed output are available as standard


Product Codes

Description	Part number
Integra Ri3 dms	RI3-01

Programmable Parameters

Parameter	Range
Password:	4-digit 0000-9999
System configuration:	1-phase 2-wire, 3-phase 3-wire, 3-phase 4-wire
Demand integration time:	OFF 5, 8, 10, 15, 20, 30, 60 minutes
CT primary current:	Maximum 9999A **
3 independent resets:	Demands and maximum demands
Communications:	Modbus RTU RS 485 or JC N2
RS485 baud rate:	2.4, 4.8, 9.6, 19.2, 38.4 kbps
RS485 parity and stop bits:	Odd or even with 1 stop bit or no parity with 1 or 2 stop bits
RS 485 Comms Address:	1-247
Modbus word order:	Normal or reverse
Pulse output allocation:	Import or export kWh or import or export KVArh
Pulse rate, rate per pulse:	0.001, 0.01, 0.1, 1, 10, 100, 1k, 10 k (max 2 pulses per sec)
Pulse output duration:	60, 100, 200 milliseconds
Energy units:	Unit, lilo or mega
Noise limit (1%):	On or off
Test:	Display ON, TOGGLE or PHASE SEQUENCE

Dimensions

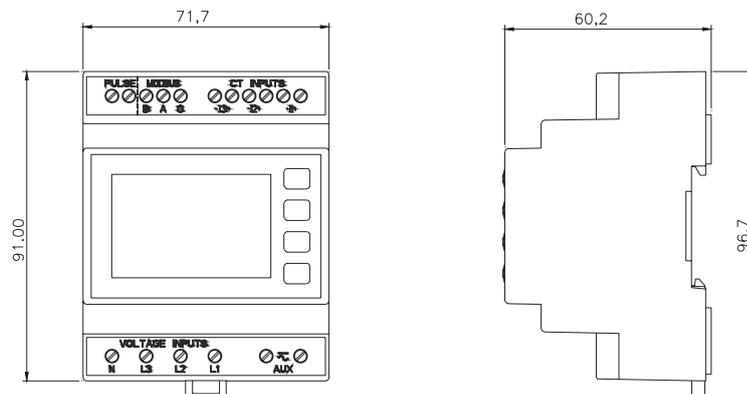


Button	Screen	Parameters
V/Hz	1	Volts L1 - N Volts L2 - N Volts L3 - N
	2	Volts L1 - L2 Volts L2 - L3 Volts L3 - L1
	3	Frequency
	4	Volts L1 - N THD% Volts L2 - N THD% Volts L3 - N THD%
	5	Volts L1 - L2 THD% Volts L2 - L3 THD% Volts L3 - L1 THD%
A	1	Current L1 Current L2 Current L3
	2	Neutral Current
	3	L1 Current Max Demand L2 Current Max Demand L3 Current Max Demand
	4	Neutral Current Max Demand
	5	Current L1 THD% Current L2 THD% Current L3 THD%
P/PF	1	kW kVAr kVA
	2	kW Max Demand
	3	Power Factor
E	1	Import kWh
	2	Export kWh
	3	Import kVArh
	4	Export kVArh

Specifications


Input	
Nominal input voltage	100-289V AC L-N (173-500V AC L-L)
Max. cont. input overload voltage	120% of nominal
Max. short duration input voltage	2 x range maximum (1 second application repeated 5 times at 5 minute intervals)
Nominal input voltage burden	< 0.2VA per phase
Nominal input current	5A AC rms
Max. cont. input overload current	120% of nominal
Max. short duration input current	10 x nominal (1 second application repeated 5 times at 5 minute intervals)
Nominal input current burden	< 0.6VA per phase
Frequency	45-66Hz
System CT primary values	1 to 9999
Auxiliary Operating range	
	110-400V AC nominal +/-10% (99-440V AC absolute limits) or 120-350V DC +/-20% (96-420V DC absolute limits)
Burden	< 10VA/5W
Accuracy	
Voltage (V)	0.5%
Current (A)	0.5%
Neutral current calculated (A)	4%
Frequency (Hz)	0.1 Hz
Power factor (PF)	1% of unity
Active power (W)	+/- 1% of range
Reactive power (VAr)	+/- 1% of range
Apparent power (VA)	+/- 1% of range
Active energy (kWh)	Class 1 (IEC 62053-21)
Reactive energy (kVArh)	+/- 1% of range
THD	1% up to 31st harmonic
Response time	1 sec
Output Pulse output relay	
	1
Contact rating	50mA max at 250V AC
Type	Solid state relay
Modbus RTU RS485 Protocol output module	1 Modbus RTU RS485 protocol channel
Type	2-wire half duplex
Baud rate	2400, 4800, 9600, 19200, 38400
Enclosure	
Enclosure style	DIN-rail - DIN 43880
Front protection rating	IP52
Case protection rating	IP30
Material	Polycarbonate to UL94V0
Weight	300g
Terminals	Shrouded screw-clamp 0.05-4mm wire
Environment	
Operating temperature	-10°C to +55°C
Storage temperature	-20°C to +70°C
Relative humidity	0-90% non-condensing
Shock	30g in 3 planes
Vibration	10Hz to 50Hz
Dielectric voltage	Withstand test 3.25kV rms 50Hz for 1 minute between comms and measuring inputs, comm and aux, aux and measuring inputs

Connection


3-Phase 3-Wire

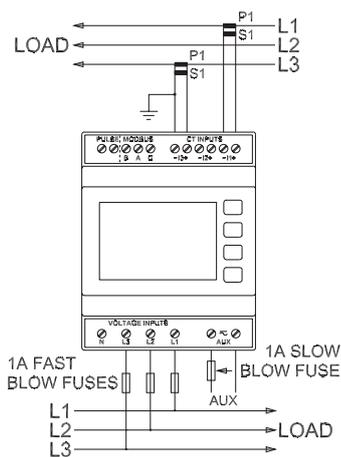

Single-Phase 2-Wire

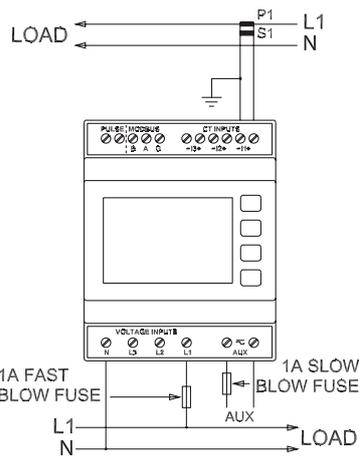

3-Phase 4-Wire

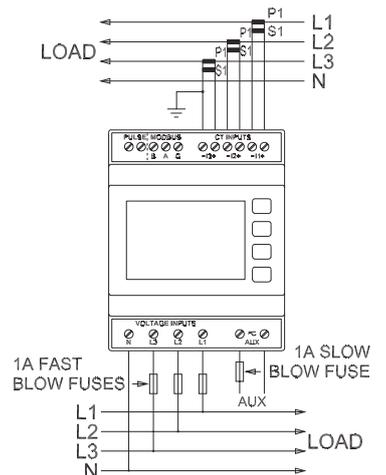

INTEGRA RI4 DIGITAL METERING SYSTEM



Features

- 0.333V AC input rms
- DIN-rail enclosure DIN 43880
- Backlit LCD screen
- Programmable CT ratio
- True rms measurements
- User programmable system configuration
- Import and Export kWh

Benefits

- Cost effective
- Simple navigation
- Crompton renowned quality
- UK manufactured

Approvals

IEC 61326
IEC 61010-1
IEC 62053-21

The Integra Ri4 digital metering system (dms) voltage input of 0.333 volts AC makes it an ideal meter for energy monitoring applications while its compact DIN-rail enclosure allows space saving for retrofit applications.

The Integra Ri4 dms is an accurate and cost effective solution for measurement and display of all major electrical and power quality parameters. Its easy programming, mounting and user-friendly navigation make the Integra Ri4 dms an ideal choice for customers who require reliable energy measurement.

Designed, developed and manufactured in the UK Integra Ri4 meter is built to high quality standards utilising the latest microprocessor and manufacturing technology.

The product features a DIN-rail enclosure, backlit LCD display and user programmable CT ratios, all accessible via an intuitive user interface. Integra Ri4 dms measures 17 electrical parameters including total harmonic distortion (THD) measurement up to the 31st harmonic.


Product Codes

Description	Part number
Integra Ri4 dms	RI4-01

Programmable Parameters

Parameter	Range
Password:	4-digit 0000-9999
System configuration:	1-phase 2-wire, 3-phase 3-wire, 3-phase 4-wire
Demand integration time:	OFF 5, 8, 10, 15, 20, 30, 60 minutes
CT primary current:	Maximum 9999A **
3 independent resets:	Demands and maximum demands
Communications:	Modbus RTU RS 485 or JC N2
RS485 baud rate:	2.4, 4.8, 9.6, 19.2, 38.4 kbps
RS485 parity and stop bits:	Odd or even with 1 stop bit or no parity with 1 or 2 stop bits
RS 485 Comms Address:	1-247
Modbus word order:	Normal or reverse
Pulse output allocation:	Import or export kWh or import or export KVArh
Pulse rate, rate per pulse:	0.001, 0.01, 0.1, 1, 10, 100, 1k, 10 k (max 2 pulses per sec)
Pulse output duration:	60, 100, 200 milliseconds
Energy units:	Unit, lilo or mega
Noise limit (1%):	On or off
Test:	Display ON, TOGGLE or PHASE SEQUENCE

Dimensions

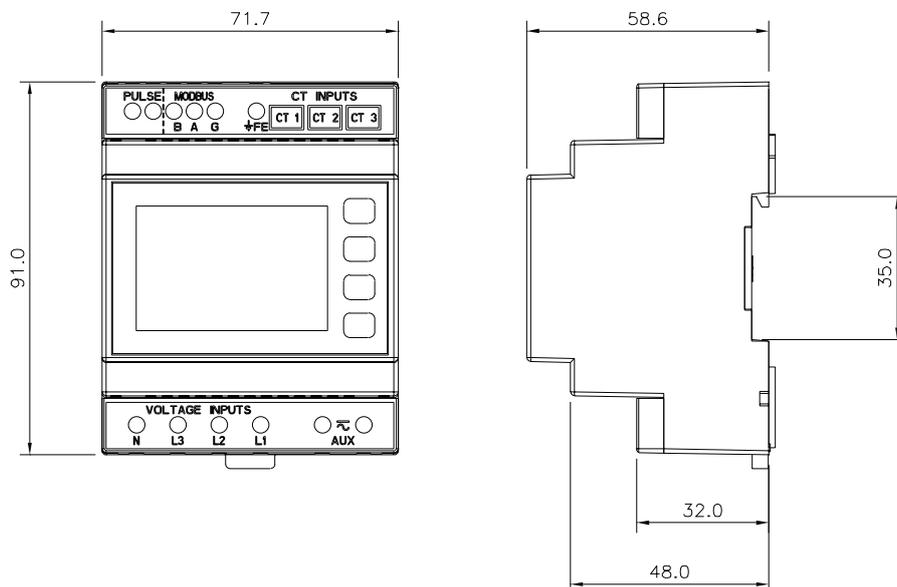


Button	Screen	Parameters
V/Hz	1	Volts L1 - N Volts L2 - N Volts L3 - N
	2	Volts L1 - L2 Volts L2 - L3 Volts L3 - L1
	3	Frequency
	4	Volts L1 - N THD% Volts L2 - N THD% Volts L3 - N THD%
	5	Volts L1 - L2 THD% Volts L2 - L3 THD% Volts L3 - L1 THD%
A	1	Current L1 Current L2 Current L3
	2	Neutral Current
	3	L1 Current Max Demand L2 Current Max Demand L3 Current Max Demand
	4	Neutral Current Max Demand
	5	Current L1 THD% Current L2 THD% Current L3 THD%
P/PF	1	kW kVAr kVA
	2	kW Max Demand
	3	Power Factor
E	1	kWh
	2	kVArh

Specifications


Input	
Nominal input voltage	100-289V AC L-N (173-500V AC L-L)
Max. cont. input overload voltage	120% of nominal
Max. short duration input voltage	2 x range maximum (1 second application repeated 5 times at 5 minute intervals)
Nominal input voltage burden	< 0.2VA per phase
Nominal input current	0.333V (333mV) AC rms
Max. cont. input overload current	120% of nominal
Max. short duration input current	10 x nominal (1 second application repeated 5 times at 5 minute intervals)
Frequency	45-66Hz
Auxiliary Operating range	110-400V AC nominal +/-10% (99-440V AC absolute limits) or 120-350V DC +/-20% (96-420V DC absolute limits)
Accuracy	
Voltage (V)	0.5%
Current (A)	0.5%
Neutral current calculated (A)	4%
Frequency (Hz)	0.1 Hz
Power factor (PF)	1% of unity
Active power (W)	+/- 1% of range
Reactive power (VAr)	+/- 1% of range
Apparent power (VA)	+/- 1% of range
Active energy (kWh)	Class 1 (IEC 62053-21)
Reactive energy (kVArh)	+/- 1% of range
THD	1% up to 31st harmonic
Response time	1 sec
Output	
Pulse output relay	1 per module
Contact rating	50mA max at 250V AC
Type	Solid state relay
Modbus RTU RS485 Protocol output module	1 Modbus RTU RS485 protocol channel
Type	2-wire half duplex
Baud rate	2400, 4800, 9600, 19200, 38400
Enclosure	
Enclosure style	DIN-rail
Front protection rating	IP52
Case protection rating	IP30
Material	Polycarbonate to UL94V0
Weight	300g
Terminals	Shrouded screw-clamp 0.05-4mm wire
Environment	
Operating temperature	-10°C to +55°C
Storage temperature	-20°C to +70°C
Relative humidity	0-90% non-condensing
Shock	30g in 3 planes
Vibration	10Hz to 50Hz
Dielectric voltage	Withstand test 3.25kV rms 50Hz for 1 minute between comms and measuring inputs, comm and aux, aux and measuring inputs

Connection


Single-Phase, 2 Wire

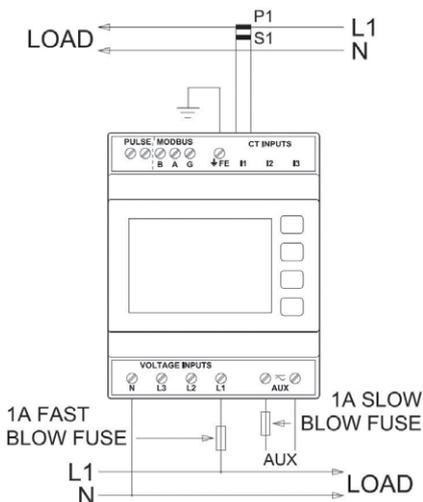

3-Phase, 3 Wire

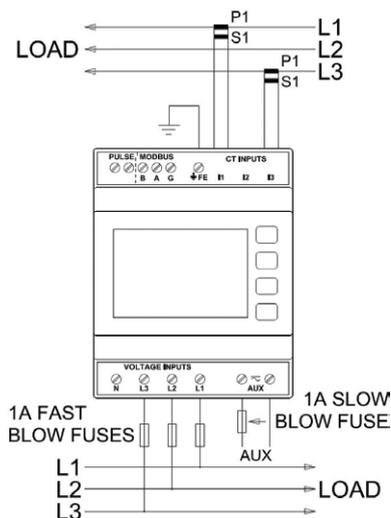

3-Phase 4-Wire

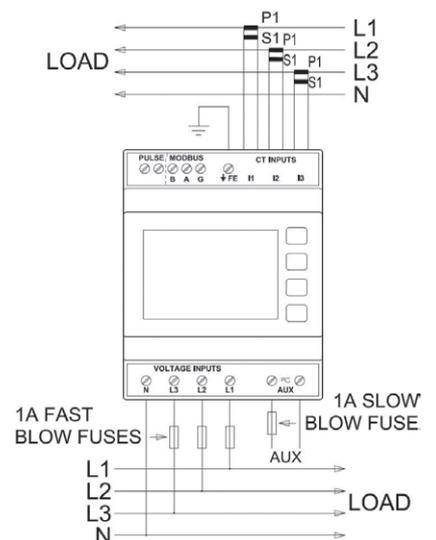

INTEGRA 1630 DIGITAL METERING SYSTEM



Features

- Low profile
- High contrast LED display
- LED annunciators for each measured parameter
- User programmable system configuration (4-wire default)
- Fully programmable VT and CT ratios
- Current demand per phase
- Elapsed time counter for connected loads
- Removable bezel for very low profile applications

Benefits

- True rms measurement
- High accuracy <0.2% on some measurements
- Configurable via software package or menu-driven interface
- Import and export monitoring

Standards

- IEC1010-1 (BSEN 61010-1 - 2001)

The Integra 1630 digital metering system (dms) provides high accuracy 0.2% measurement, display and communication of all major electrical and power quality parameters including total harmonic distortion (THD) up to the 31st harmonic. To suit user requirements, the range includes single-phase, three-phase three-wire and three-phase four-wire capability, all selectable at the point of installation.

This DIN 96 panel mounting enclosure offers simple programming and display of up to 35 electrical parameters via a simple menu-driven user interface on the front panel. Optional pulsed and digital communication outputs are available, to allow up to 60 parameters to be communicated to building management systems. A Windows-based software package is available to remotely configure the Integra dms and display all 60 major parameters.

Operation

Integra 1630 dms offers uncomplicated operation and high accuracy measurement of three-phase voltage, current, frequency, Watts, VAr, VA, energy, power factor, and total harmonic distortion of both phase and system, current and voltage. Integra 1630 dms includes true measurement of both line-to-neutral, and line-to-line voltages, ensuring accurate readings. The pre-calibrated plug-in option cards allow cost effective upgrades with any combination of pulsed, analogue and digital communication outputs. Cards slot simply into the back of the unit and products do not need to be removed from the installation or recalibrated.

Pulsed Outputs

Integra 1630 meters offer optional single or dual pulsed outputs, programmable to represent import or export kWh, import or export kVAh or kVAh. The output pulses have programmable pulse rate divisor and pulse width.

Modbus RTU RS485 Protocol

Integra 1630 dms offers an RS485 communication port using the Modbus RTU RS485 protocol or the Johnson Controls Metasys NII protocol. Integra 1630 meter establishes the format for the master's query automatically, and responds with the correct protocol using IEEE floating point values.

Modbus TCP (Ethernet)

Integra 1630 dms options include an Ethernet communication module for connection to SCADA systems using the Modbus TCP protocol. The Integra 1630 dms with Ethernet option module acts as a Modbus slave device and may be queried by a Modbus master device. All messages sent to the Integra Ethernet interface must conform to the Modbus TCP protocol.

BACnet IP Interface

Integra 1630 dms options include an Ethernet communication module for connection to SCADA systems using the BACnet IP protocol. The Integra 1630 dms acts as a server device and waits to receive commands from a BACnet/IP client. A BACnet/IP client (e.g. a SCADA system running on a PC), is used to instigate communication with the meter. All messages sent to the Integra Ethernet interface must conform to the BACnet IP protocol.

BACnet MSTP Interface

Integra 1630 options include a BACnet MSTP module for connection via RS485 to SCADA or Building Automation and Management systems running BACnet MSTP clients. The Integra 1630 acts as a server device and waits to receive requests from a BACnet client that must conform to the BACnet MSTP Protocol. The module is fitted with a three-way screw terminal block to daisy-chain the BACnet communications cable.

Profibus™ DP Protocol

The Integra 1630 provides Profibus™ DP communication via 9-way D type connections in an extension module.

Measurement and Display

Up to 35 electrical and power quality parameters can be configured and displayed.

- 1 System (average) volts
System (average) current
System (total) kW
- 2 System volts (average) THD%
System current (average) THD%
- 3 Volts L1 - N
Volts L2 - N
Volts L3 - N
(4-wire only)
Volts L1 - L2
Volts L2 - L3
Volts L3 - L1
(3-wire only)
- 4 Volts L1 - N THD%
Volts L2 - N THD%
Volts L3 - N THD%
(4-wire only)
Volts L1 - L2 THD%
Volts L2 - L3 THD%
Volts L3 - L1 THD%
(3-wire only)
- 5 Volts L1 - L2
Volts L2 - L3
Volts L3 - L1
(4-wire only)
- 6 Current L1
Current L2
Current L3
- 7 Current line 1 THD %
Current line 2 THD %
Current line 3 THD %
- 8 Neutral current
(4-wire only)
Frequency
Power factor (overall)
- 9 kVAr kVA kW
- 10 kW Hr import (7-digit resolution)
- 11 kVArh import (7-digit resolution)
- 12 kW Hr export (7-digit resolution)
- 13 kVArh export (7-digit resolution)
- 14 kW demand
Current demand
- 15 Maximum kW demand Maximum current demand
- 16 Hours run

Product Codes

Description	Cat. no.
1-phase, 3-phase 3/4-wire, 100-240V L-L, 5A CT input, Aux. 100-250V AC/DC	INT-1630-L-5-M-option
1-phase, 3-phase 3/4-wire, 241-480V L-L, 5A CT input, Aux. 100-250V AC/DC	INT-1630-M-5-M-option
Options	
No options	000
1 pulsed output	100
2 pulsed output	200
Modbus RTU RS485 protocol	010
Modbus RTU RS485 protocol + 1kWhr pulsed output	110
Modbus RTU RS485 protocol + 2kWhr pulsed output	210
Profibus™	050
Modbus RTU RS485 protocol TCP	070
BACnet IP interface	080
BACnet MSTP interface	090
Extended collar	OPT-1630-collar

Programmable Parameters

Parameter	Range
Password:	4-digit 0000-9999
CT primary current:	Maximum 9999A ** CT Secondary Current: 5A (1A option)
VT primary voltage:	Maximum 400kV **
VT secondary voltage:	Nominal input voltage ** maximum VT or CT ratios are limited so that the combination of primary voltage and current do not exceed 360MW at 120% of relevant input
Demand integration time:	8, 15, 20, 30, 60 minutes
3 independent resets:	Demands and maximum demands Energy registers Hours run
Pulse output duration:	60, 100, 200 milliseconds
Pulse rate divisors:	1, 10, 100, 1000
RS485 baud rate:	4.8, 9.6, 19.2, 38.4 kBd
RS485 parity and stop bits:	Odd or even with 1 stop bit or no parity with 1 or 2 stop bits

Specifications




Nominal input voltage	57.7 to 277V L-N, 100 to 480V L-L
Max. continuous input voltage:	120% of nominal
Max. short duration input voltage	2 x nominal for 1 second, repeated 10 times at 10 second intervals
System VT ratios (primary):	Any significant 4-digit integer value up to 400kV **
Nominal input voltage burden	<0.2VA
Nominal input current	5A (1 option)
System CT primary values:	Any integer value up to 9999A **
Max. continuous input current:	120% nominal
Max. short duration input current:	20 x nominal for 1 second, repeated 5 times at 5 minute intervals
Nominal input current burden:	< 0.6 VA** maximum CT and VT ratios are limited so that the combination of primary voltage and current do not exceed 360MW at 120% of relevant input
Output modules (optional)	
RS485 communications:	2-wire half duplex
Baud rates:	4800, 9600, 19200, 38400
Pulsed:	Solid state relays
Pulse duration:	60, 100 or 200 milliseconds
Contact rating:	50mA max at 250V AC max
Pulsed outputs:	1 or 2





Specifications continued

Auxiliary	
Standard nominal supply:	100-250V AC or DC voltage: (85-287V AC absolute limits) (85-312V DC absolute limits)
AC supply frequency range:	45-66Hz
AC supply burden:	6VA
Optional auxiliary DC supply:	12-48V DC (10.2-60V DC absolute limits)
DC supply burden:	6VA
Measuring ranges	
Voltage:	80-120% of nominal (functional 5-120%)
Current:	5-120% of nominal
Frequency:	45-66Hz
Power factor:	0.8 capacitive-1-0.8 inductive (functional 4 quadrant, 0-1 lag/lead)
THD:	Up to 31st harmonic 0-40% Measured voltage >5% of range Measured current >5% of nominal Full accuracy of voltage >25% of range Full accuracy of current >25% of nominal
Energy:	7-digit resolution
Reference conditions	
Ambient temperature:	23 ±1°C
Input frequency:	50 or 60Hz ±2%
Input waveform:	Sinusoidal (distortion factor < 0.005)
Auxiliary supply voltage:	Nominal ±1%
Auxiliary supply frequency:	Nominal ±1%
AC auxiliary supply waveform:	Sinusoidal (distortion factor < 0.05)
Magnetic field of external origin:	Terrestrial flux
Accuracy	
Voltage:	±0.17% of range maximum
Current:	±0.17% of nominal
Frequency:	±0.15% of mid frequency
Active power:	±0.2% of range maximum
Power factor:	1% of unity
Reactive power (VAR):	±0.5% of range maximum
Apparent power (VA):	±0.2% of range maximum
THD:	±1%
Neutral current calculated:	±0.95% of nominal
Energy:	0.3% of range maximum (Better than class 1) IEC1036 Sect 4.6)
kVArh:	0.6% of range maximum
Temperature coefficient:	Voltage and current typical: 0.013%/°C Watts typical: 0.018%/°C
Enclosure	
Enclosure style:	DIN 96 panel mount
Compliant with:	IEC 1010-1/ BSEN 61010-1 : 2001 CAT III, CE EMC and LVD directives
Material:	Polycarbonate
Terminals:	Shrouded screw-clamp 0.05mm to 4mm wire
Dielectric voltage:	Withstand test 3.25kV rms 50Hz for 1 minute between all electrical circuits
Operating temperature:	-20 to +60°C
Storage temperature:	-30 to +80°C
Relative humidity:	0-90% (non condensing)
Warm-up time:	1 minute
Shock:	30g in 3 planes
Vibration:	10-18Hz, 1.5mm peak-to-peak 18-150Hz @1g
IP protection:	IP54
Dimensions:	96mm wide x 96mm high x 79mm deep (max). Typically <60mm depth behind panel 3.78" wide x 3.78" high x 3.11" deep (max)
Panel cut-out:	92mm x 92mm, 3.62" x 3.62"


Wiring

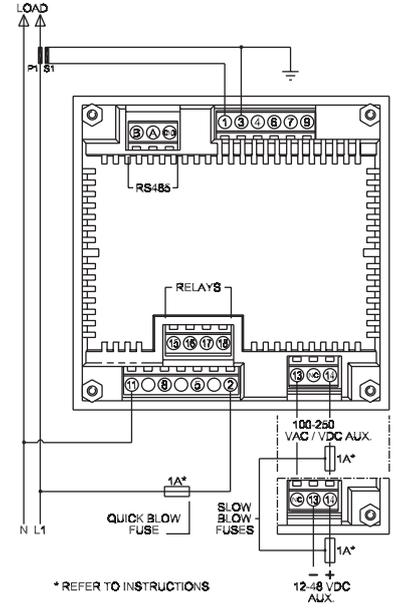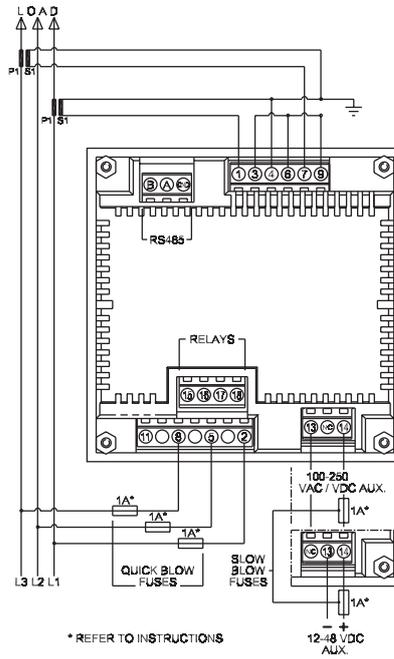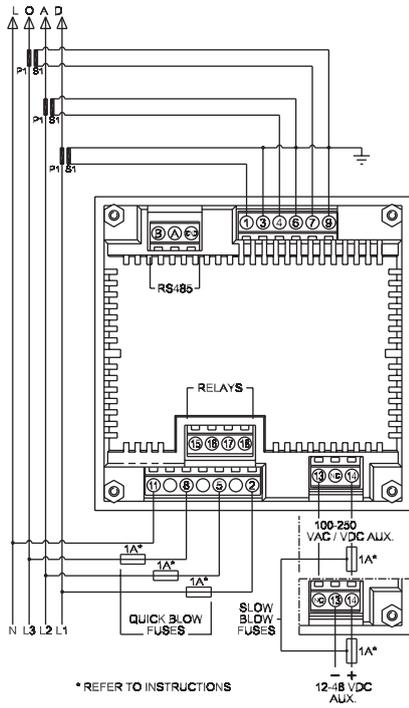

Dimensions

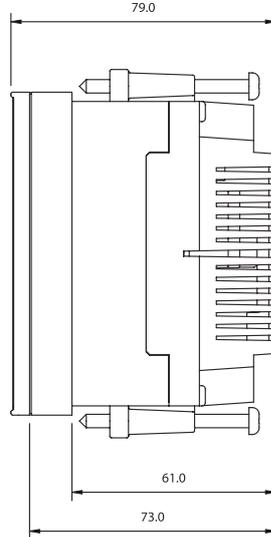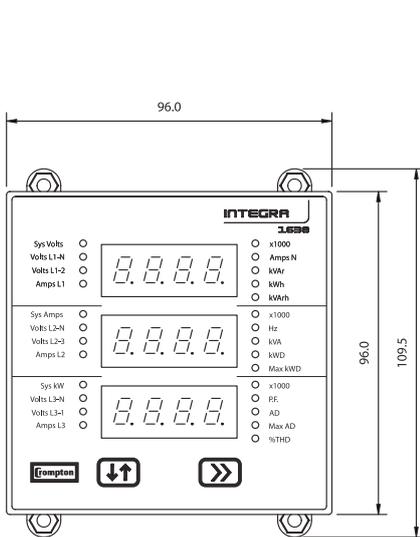

Panel cut-out



INTEGRA 1530 DIGITAL METERING SYSTEM



Features

- Measure and display up to 34 electrical and power parameters
- Measure and communicate up to 50 electrical and power parameters
- High-contrast red LED display
- LED annunciators for each measured parameter
- THD measurement and power quality data to 31st harmonic
- True rms measurement
- Pulsed, analogue and digital outputs
- Modbus, Johnson Controls and Lonworks protocol interface options
- Fully programmable VT and CT ratios

Benefits

- Replaces multiple single function instruments
- Pre-calibrated plug-in options
- High accuracy <0.2%
- Configurable via software package or menu driven interface
- Import and export monitoring
- Neutral CT input option
- True 3-and 4-wire measurement

Standards

- UL file no: E20300
- UL 61010B-1
- IEC 1010-1/BSEN 61010-1 CAT III

The Integra 1530 series instruments provide high accuracy <0.2% measurement, display and communication of all major electrical and power quality parameters, including true rms system values, and total harmonic distortion (THD) up to the 31st harmonic.

This DIN 96 panel mounting enclosure offers programming and display of up to 34 power measurement parameters. Optional pulsed, analogue and digital communication outputs, allow the communication of information of up to 50 measured parameters into building management systems. A Windows-based software package is available to remotely configure the Integra dms and display all 60 major parameters.

Operation

Integra 1530 digital metering system (dms) offers uncomplicated operation and high accuracy measurement of three-phase voltage, current, frequency, Watts, VAr, VA, energy, power factor, and total harmonic distortion of both phase and system, current and voltage. Integra 1530 dms includes true measurement of both line-to-neutral, and line-to-line voltages, ensuring accurate readings.

System Inputs

Designed for all low, medium and high voltage switchgear and distribution systems, the Integra 1530 meter offers programmable VT and CT ratio capability. Direct connection for up to 480V AC with 5A CT inputs is standard, and 1A CT inputs available as an option.

Neutral CT Input Option

Integra 1530 dms offers a three-phase four-wire version with a neutral 4th CT, allowing true neutral current measurement and protection in high harmonic environments.

System Outputs

Integra dms pre-calibrated plug-in option cards allow cost effective upgrades with combinations of pulsed, analogue and digital communication outputs. Cards slot simply into the back of the unit and products do not need to be removed from the installation or recalibrated.

Modbus RTU RS485

Integra 1530 meter offers a communication port for systems using Modbus RTU or Johnson Controls Metasys NII protocols. Modbus communications can be used together with pulse and analogue output options.

Lonworks Protocol Interface

The Lonworks protocol interface option is designed according to the LonMark Interoperability Guidelines version 3.2. This ensures Integra meters can be integrated into a single control network without requiring custom node or network tool development.

Programmable Display

A two-button interface on the front panel provides configuration programming of system (three-phase four-wire etc), VT and CT ratio settings, selected communication options and adjustment of operating parameters. All set-up screens offer password protection. Status information can be viewed by scrolling through 15 screens featuring a high contrast three-line, four-digit LED display, with separate annunciators for each of the 34 measured parameters.



Measurement and Display

Up to 34 electrical and power quality parameters can be configured and displayed on the Integra 1530 dms unit.

- 1 System volts
System current
System kW
- 2 System volts THD %
System current THD %
- 3 Volts L1 - N (4-wire only)
Volts L2 - N (4-wire only)
Volts L3 - N (4-wire only)
- 4 Volts L1 - L2
Volts L2 - L3
Volts L3 - L1
- 5 Volts line 1 THD %
Volts line 2 THD %
Volts line 3 THD %
- 6 Current L1
Current L2
Current L3
- 7 Current line 1 THD %
Current line 2 THD %
Current line 3 THD %
- 8 Neutral current (4-wire only)
Frequency
Power factor
- 9 kVAr
kVA
kW
- 10 kWh import (7-digit resolution)
- 11 kVAh import (7-digit resolution)
- 12 kWh export (7-digit resolution)
- 13 kVAh export (7-digit resolution)
- 14 kW demand
Current demand
- 15 kW maximum demand
Current maximum demand

Enhanced status information of up to 50 parameters can be communicated into building management systems via optional pulsed, analogue and digital outputs.




Product Codes

Description	Cat. no.
1-phase 2-wire 100-240V L-L, 5A CT input. Aux. 100-250V AC/DC	INT-1630-L-5-M-option
1-phase 2-wire 241-480V L-L, 5A CT input. Aux. 100-250V AC/DC	INT-1531-M-5-M-option
1-phase 3-wire 100-240V L-L, 5A CT input. Aux. 100-250V AC/DC	INT-1532-L-5-M-option
1-phase 3-wire 241-480V L-L, 5A CT input. Aux. 100-250V AC/DC	INT-1532-M-5-M-option
3-phase 3-wire 100-240V L-L, 5A CT input. Aux. 100-250V AC/DC	INT-1533-L-5-M-option
3-phase 3-wire 241-480V L-L, 5A CT input. Aux. 100-250V AC/DC	INT-1533-M-5-M-option
3-phase 4-wire 100-240V L-L, 5A CT input. Aux. 100-250V AC/DC	INT-1534-L-5-M-option
3-phase 4-wire 241-480V L-L, 5A CT input. Aux. 100-250V AC/DC	INT-1534-M-5-M-option
3-phase 4-wire with true neutral measurement 100-240V L-L, 5A CT input, Aux 100-250V AC/DC	INT-1535-L-5-M-option
3-phase 4-wire with true neutral measurement 241-480V L-L, 5A CT input, Aux 100-250V AC/DC	INT-1535-M-5-M-option
Options	
Lonworks protocol	030
1 analogue output (0/20mA)	001=1
2 analogue outputs (0/20mA)	002=1

Programmable Parameters

Parameter	Range
Password:	4-digit 0000-9999
Primary current:	Max 9999:5A (360MW max**)
VT primary:	400kV (360MW max**)
Secondary voltage:	Nominal system voltage ** maximum VT and CT ratios are limited so that the combination of primary voltage and current does not exceed 360MW at 120% of relevant input
Demand integration time:	8, 15, 20, 30 and 60 minutes
Reset:	Max demand and active energy registers
Pulse output duration:	60, 100, 200 ms
Pulse rate divisors:	1, 10, 100, 1000
RS485 interface baud rate:	2.4, 4.8, 9.6, 19.2kB
RS485 parity:	Odd/even/no, 1 or 2 stop bits
Modbus RTU RS485 protocol address:	1-247
Analogue outputs:	User definable

Dimensions

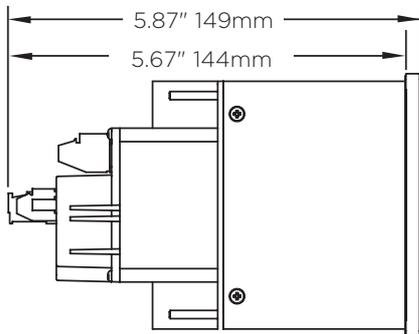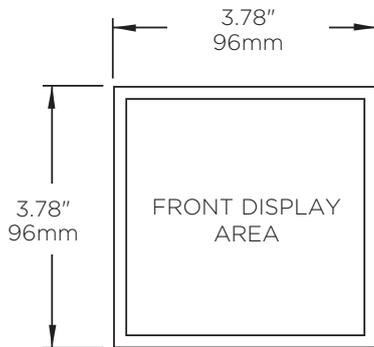

MAX PANEL THICKNESS 0.19", 5mm


Specifications

Nominal input voltage:	57.7 to 277V L-N, 100 to 480V L-L
Max continuous input voltage:	120% of nominal
Max short duration input voltage:	2 x for 1 second, repeated 10 times at 10 second intervals
System VT ratios (primary):	Any value up to 400kV **
Nominal input voltage burden:	< 0.2 VA
Nominal input current:	5A (1A option)
System CT primary values:	9999:5A or 9999:1A max 360MW **
Max continuous input current:	120% nominal
Max short duration current input:	20 x for 1 second, repeated 5 times at 5 second intervals
Optional auxiliary DC supply:	12-48V DC (10.2-60V DC absolute limits)
Nominal input current burden:	< 0.6 VA
** maximum VT and CT ratios are limited so the combination of primary voltage and current does not exceed 360MW at 120% of relevant input	
Outputs (optional)	
RS485 communications:	2-wire half duplex
Baud rates:	2400, 4800, 9600, 19200
Pulsed:	Clean contact SPNO
Pulse duration:	60, 100 or 200 milliseconds
Pulsed outputs:	1 or 2
Analogue outputs:	1 or 2
Auxiliary	
Standard nominal supply voltage:	100-250V, AC or DC (85-287V, AC absolute) (85-312V, DC absolute)
AC supply frequency range:	45-66Hz
AC supply burden:	6VA
Optional auxiliary DC supply:	12-48V, DC (10.2-60V, DC absolute)
DC supply burden:	6 VA
Measuring ranges	
Voltage:	80-120% of nominal (functional 5-120%)
Current:	5-120% of nominal
Frequency:	45-66Hz
Power factor:	0.8 capacitive - 1 - 0.8 inductive (functional 4 quadrant, 0-1 lag/lead)
THD:	Up to 31st harmonic (0%-40%)
Energy:	7-digit resolution
Reference conditions	
Ambient temperature:	23°±1°C
Input frequency:	50 or 60Hz ±2%
Input waveform:	Sinusoidal (distortion factor < 0.005)
Auxiliary supply voltage:	Nominal ±1%
Auxiliary supply frequency:	Nominal ±1%
AC auxiliary supply waveform:	Sinusoidal (distortion factor < 0.05)
Magnetic field of origin:	Terrestrial flux
Accuracy	
Voltage:	±0.17% of range maximum
Current:	±0.17% of nominal
Frequency:	±0.15% of mid frequency
Active power:	±0.2% of range maximum
Power factor:	1% of unity
Reactive power (VAr):	±0.5% of range maximum
Apparent power (VA):	±0.2% of range maximum
THD:	±1%
Neutral current calculated:	±0.95% of nominal
Neutral current measured:	±0.17%
Energy:	0.3% or range maximum (Better than class 1 IEC1036 Sect 4.6)
KVArh:	0.6% of range maximum
Temperature coefficient:	Voltage & current typical: 0.013%/°C
Watts typical:	0.018%/°C
Update time:	Display: 1 second. Optional digital port: 250ms
Analogue output:	±0.2%


Specifications continued

Enclosure	
Enclosure style:	DIN 96 panel mount
Compliant with:	UL E20300, UL61010B-1, IEC 1010-1/BSEN 61010-1 CATIII, EMC and LVD
Material:	Polycarbonate
Terminals:	Shrouded screw-clamp
Dielectric voltage:	Withstand test 3.25kV rms 50Hz for 1 minute between all electrical circuits
Operating temperature:	-20 to +60°C
Storage temperature:	-30 to +80°C
Relative humidity:	0-90% (non condensing)
Warm-up time:	1 minute
Shock:	30g in 3 planes
Vibration:	10-15Hz, 1.5mm peak-to-peak/15-150Hz @ 1g IP protection: IP54
Dimensions:	96mm wide x 96mm high x 149mm deep (max) 3.78" wide x 3.78" high x 5.87" deep (max)
Panel cut-out:	92mm x 92mm, 3.62" x 3.62"


Connections Single-Phase

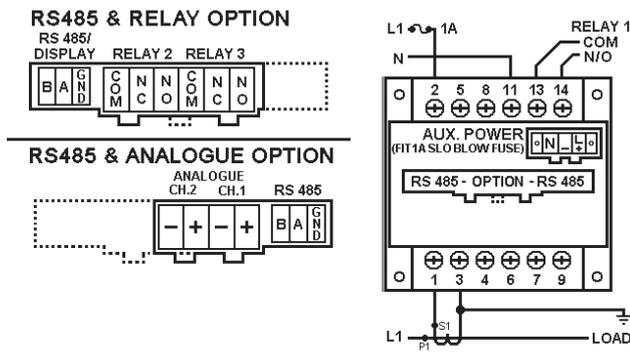


Single-Phase 3-Wire

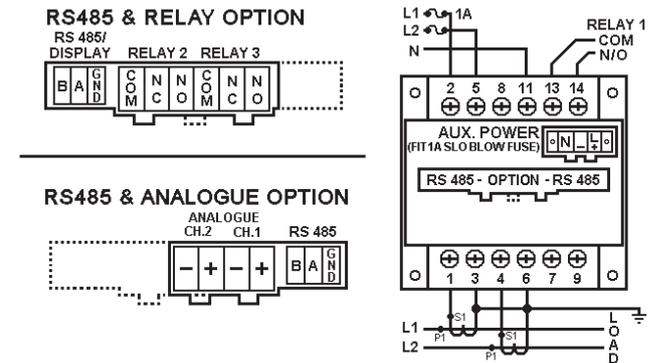


3-Phase 3-Wire

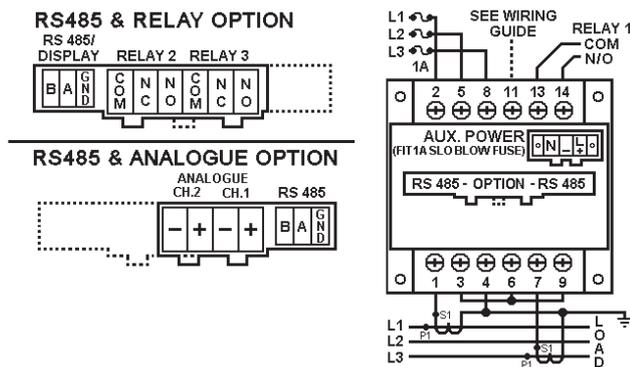

3-Phase 4-Wire

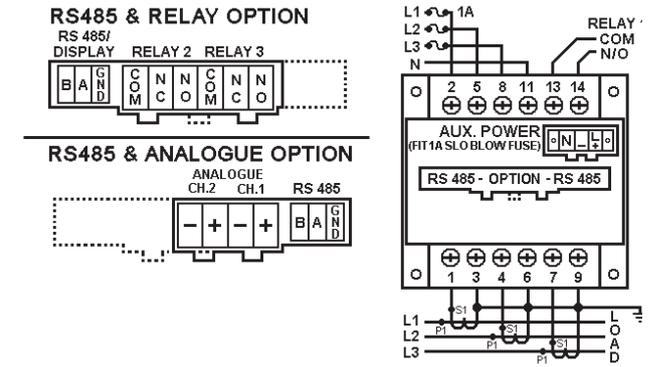

3-Phase 4-Wire with neutral CT

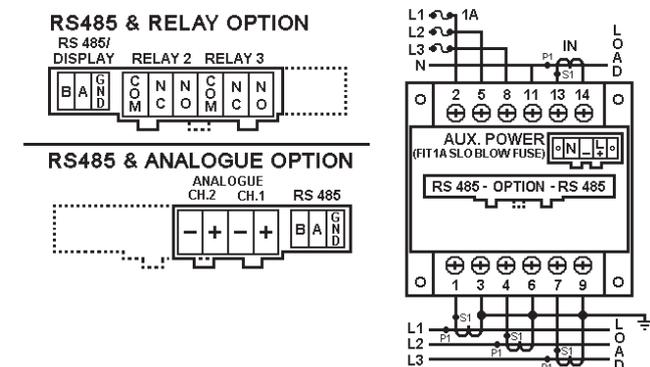

INTEGRA 1540 DIGITAL METERING SYSTEM



Application

- Switchgear
- Distribution systems
- Generator sets
- Control panels
- Energy management
- Building management
- Utility power monitoring
- Process control
- Motor monitoring

Features

- Measurement, display and communication of up to 31 power parameters
- THD measurement and power quality data
- True rms measurement
- Pulsed energy outputs
- Digital communications
- Fully programmable VT and CT ratios
- Simple menu driven interface
- ANSI case style
- High quality LED display

Benefits

- Replaces multiple single function instruments
- Simple menu driven interface
- Remote monitoring
- Monitoring, control and protection of power assets

Standards

- UL file no: 140758
- IEC 1010/BSEN 61010-1

The Integra 1540 dms series provides programmable measurement, display and communication of up to 31 major electrical and power quality parameters including true rms system values, total harmonic distortion (THD) and power quality data. The menu-driven interface allows the programming of voltage, current, and power measurement parameters. Status of all parameters can be viewed through 13 screens on the three-line, four-digit LED display. The Integra 1540 meter has pulsed and digital communication outputs.

System Input

Designed for all low, medium and high-voltage switchgear and distribution systems, the Integra 1540 digital metering system (dms) has customer programmable VT and CT ratio capability. Direct connection of up to 600V AC with 5A CT inputs is available as standard, and 1A CT input is available as an option.

Pulsed Outputs

Integra 1540 dms offers an optional pulse output module. Outputs are pulsed proportionally to the rate of measured kWh active energy, with pulse width and rate programmable via the set-up screens.

Modbus RTU RS485

Integra 1540 dms offers an RS485 communication port for direct connection to SCADA systems using the Modbus RTU protocol, or the Johnson Controls Metasys NII protocol. The Modbus protocol establishes the format for the master's query and the slave's response; it contains the fields confirming the action taken, the data to be returned, and an error-checking field. The Modbus RTU option includes the ability to change Modbus word order to suit the requirements of the user.

Programmable Display

A two-button interface on the front panel provides configuration programming of system (e.g. three-phase four-wire), VT and CT ratio settings, selected communication options and adjustment of operating parameters. All set-up screens offer password protection. Status information can be viewed by scrolling through 13 screens featuring a high contrast 3-line, 4-digit LED display, with separate annunciators for each of the 31 measured parameters.

Auxiliary Supply

The Integra dms family should ideally be powered from a dedicated supply, either 100-250V AC or DC (85-280V AC Absolute or 85-312V DC Absolute) or 12-48V DC (10.2-60V DC absolute). However the device may be powered from the signal source, provided the source remains within the working range of the chosen auxiliary supply.

Fusing

It is recommended that all voltage lines be fitted with 1 amp fuses.

Safety/Ground Connections

For safety reasons, all CT secondary connections should be grounded in accordance with local regulations.

Product Codes

Product code	Product configuration
INT-1544-***-5-*option	Integra 1540 dms 3-phase 4-wire 5A CT input
INT-1543-***-5-*option	Integra 1540 dms 3-phase 3-wire 5A CT input
Input voltage suffix ***	
100	100V L-L (57.7V L-N)
110	110V L-L (63.5V L-N)
115	115V L-L (66.4V L-N)
120	120V L-L (69.3V L-N)
139	139V L-L (80.2V L-N)
208	208V L-L (120V L-N)
240	240V L-L (139V L-N)
277	277V L-L (160V L-N)
380	380V L-L (220V L-N)
400	400V L-L (230V L-N)
415	415V L-L (240V L-N)
480	480V L-L (277V L-N)
600	600V L-L (346V L-N)

Measurement and Display

Integra 1540 dms offers configuration, display and communication of up to 31 electrical and power quality parameters.

1. System volts
System current
System kW
2. System volts THD %
System current THD %
3. Volts L1 - N
Volts L2 - N
Volts L3 - N
4. Volts L1 - L2
Volts L2 - L3
Volts L3 - L1
5. Volts line 1 THD %
Volts line 2 THD %
Volts line 3 THD %
6. Current L1
Current L2
Current L3
7. Current line 1 THD %
Current line 2 THD %
Current line 3 THD %
8. Neutral current
Frequency
Power factor
9. kVAR
kVA
kW
10. kWh (7-digit resolution)
11. kVAh (7-digit resolution)
12. kW demand
Current demand
13. kW maximum demand
Current maximum demand

Product Codes continued

Product code	Product configuration
Auxiliary voltage suffix*	
L	12-48V DC
M	100-250V AC/DC
Communications options	
M	RS485 Modbus RTU or Johnson Controls Metasys NII
W	kWh pulsed output
Order Code Example INT-1544-120-5-L-W Integra 1540 dms 3-phase 4-wire, 120V L-L (69.3 L-N) nominal voltage, 5A CT input, 12-48V DC auxiliary supply, with pulsed output option.	

Programmable Parameters




Parameter	Range
Password:	4-digit 0000-9999
Primary current:	Max 9999:5A (360MW max**)
VT primary:	400kV (360MW max**)
Secondary voltage:	Nominal system voltage ** maximum VT and CT ratios are limited so that the combination of primary voltage and current does not exceed 360MW at 120% of relevant input
Demand integration time:	8, 15, 20, 30 and 60 minutes
Reset:	Max demand and active energy registers
Pulse output duration:	60, 100, 200 ms
Pulse rate divisors:	1, 10, 100, 1000
RS485 interface baud rate:	2.4, 4.8, 9.6, 19.2kB
RS485 parity:	Odd/even/no, 1 or 2 stop bits
Modbus RTU RS485 protocol address:	1-247
Analogue outputs:	User definable

Specifications


Nominal input voltage:	57.7 to 346V L-N, 100 to 600V L-L
Max continuous input voltage:	120% nominal
Max. short duration input voltage:	2 x for 1 second, repeated 10 times at 10 second intervals
System VT ratios (primary):	400kV or 360MW **
Nominal input voltage burden:	< 0.2VA
Nominal input current:	5A (1A option)
System CT primary values:	9999:5A or 9999:1A max 360MW **
Max continuous input current:	120% nominal
Max. short duration current input:	20 x for 1 second, repeated 5 times at 5 second intervals
Nominal input current burden:	< 0.6VA
Outputs	
RS485 communications:	2-wire half duplex
Baud rates:	2400, 4800, 9600, 19200
Pulsed:	Clean contact SPNO, 100V DC 0.5A max
Pulse duration:	60, 100 or 200 milliseconds
Auxiliary	
Standard nominal supply voltage:	100-250V AC or DC (85-287V AC absolute) (85-312V DC absolute)
AC supply frequency range:	45-66Hz
AC supply burden:	6VA
Optional auxiliary DC supply:	12-48V DC (10.2-60V DC absolute)
DC supply burden:	6VA

Dimensions

RS485 OUTPUT			PULSED OUTPUT	
B	A	Gnd	COM	N/O

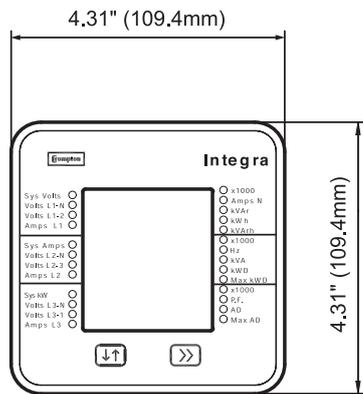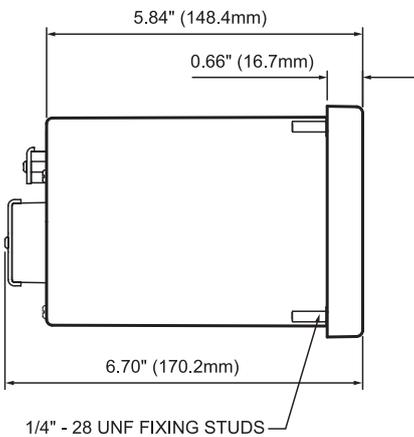

Panel cut-out

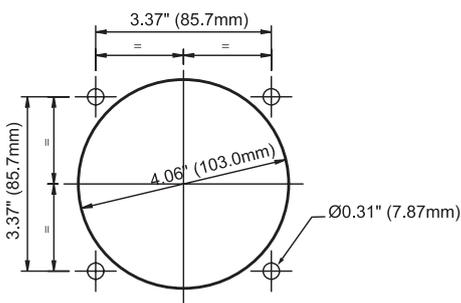

Specifications continued


Measuring ranges	
Voltage:	50-120% of nominal (functional 5-120%)
Current:	5-120% of nominal (50%-120% for THD)
Frequency:	45-66Hz
Power factor:	0.5 inductive - 1 - 0.8 capacitive
THD:	To 15th Harmonic V & A
Energy:	7-digit resolution
Accuracy	
Voltage:	±0.1% of range ±0.4% of reading
Current:	±0.1% of range ±0.4% of reading
Power:	±0.1% of range ±0.9% of reading
THD:	±1%
Neutral current:	±4% of range
Energy:	kWh 1% IEC1036 (PF 0.8-1-0.8)
KVArh:	2% IEC1036 (PF 0.8-1-0.8)
Temperature coefficient:	0.013%/°C typical
Update time:	500ms display 250ms optional digital port
Enclosure	
Enclosure style:	ANSI C39.1
Compliant With:	UL 140758 and IEC 1010/BSEN 61010-1
Material:	Polycarbonate front and base, steel case
Terminals:	Barrier terminal strip 6-32 binding head screw
Dielectric voltage:	Withstand test 3.25kV rms 50Hz for 1 minute between all electrical circuits
Operating temperature:	-20 to +70°C
Storage temperature:	-30 to +80°C
Relative humidity:	0-95% (non condensing)
Warm-up time:	1 minute
Shock:	30g in 3 planes
Vibration:	10-15Hz, 1.5mm peak to peak/15-150Hz@1g
Enclosure integrity:	IP54 (front face)
Dimensions:	4.31" high x 4.31" wide x 6.7" deep 109.4mm high x 109.4mm wide x 170.2mm deep
Panel cut-out:	4.06" (103mm) diameter, 4 stud positions

Wiring


Input connections are made to screw-clamp terminals. Terminals for both current and voltage connections are sized to accept two #12 AWG (3mm²) solid or stranded wires, or ring lugs suitable for 6-32 screws. Connections for communications and pulse outputs use identical style terminals.

Wiring

3-Phase 3-Wire

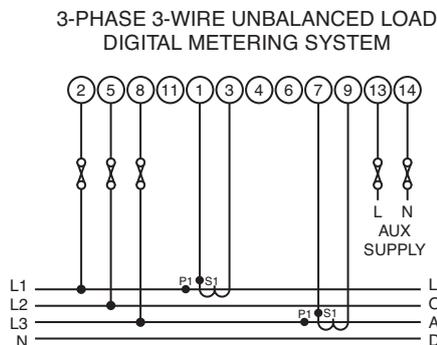

3-Phase 4-Wire

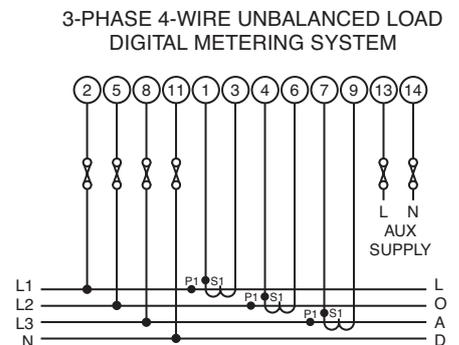

INTEGRA COMMUNICATION AND CONFIGURATION SOFTWARE



Features

- Remote metering
- Remote status information
- PC configuration of programmable parameters
- Full access to each and every parameter
- Upload and download Integra dms settings
- View and edit Integra dms settings
- Load and save parameter settings
- Print data logs
- Password protected

Applications

- PC based communication systems
- SCADA Systems
- PLC interfacing
- Energy management systems

INTEGRA software is a Windows style user interface enabling remote monitoring and configuration of Integra dms parameters, outputs, digital communications, pulsed relays, current and power demand. The software can be installed on any PC running Windows. The software allows the user to load and save configurations to a PC hard disk and to send and retrieve settings directly from the Integra dms. Settings can also be copied between individual Integra dms units. Up to 31 Integra dms units can be connected to a PC COM port via an RS485/RS232 converter, however, the software can only communicate with one Integra dms at a time. Status information of measured parameters is usually communicated into a building management system, but can also be monitored through the configuration software. The software queries the selected Integra dms every few seconds to obtain data which can be viewed on a dedicated measurements page.

Password Security

Access to Integra dms programmable parameters is password protected, however, settings and the electrical measurements can be viewed without entering the password. The access passwords entered on the PC must be identical to those stored inside the Integra dms.

Operation

The software is designed to provide two functions: to display and configure the parameters of an Integra dms unit, and to monitor the measured values of the selected Integra dms. The software is extremely simple to operate, featuring user-friendly navigation toolbars and drop-down menus.

Options

There are available three versions of INTEGRA dms software for download from our website.

http://crompton-instruments.com/integra_swd.html

- INT-SOFT - Version 1.0.19 for Integra 1530 and Integra 1560/1580 dms
- Integra 1630 dms Configurator V 1.0.0 for Integra 1630 dms
- Integra Ci3 dms Configurator v1.0.10 for Integra Ci3 dms

INTEGRA dms software can be downloaded from

[www.http://crompton-instruments.com/integra_swd.html](http://www.crompton-instruments.com/integra_swd.html)

INT-SOFT window	Menu
Measurements:	Displays all measurement values
System window:	System type, volts, current, max system power, secondary volts, nominal volts, firmware version, special product code
Password:	Existing password, new password, confirm password, change password
Analogue outputs:	Set-up of phase readings, output modes, operating mode, trim controls, output of power factor parameters
Digital communications:	Baud rate, parity, stop bits and unique address
Read/write register:	Display and modification of Modbus registers
Configuration toolbar	Description
New configuration:	Create new Integra dms configuration
Open configuration file:	Load an existing configuration from a disk file
Save configuration file:	Save the current configuration to a disk file
Print configuration:	Send the current configuration to a printer
Online:	Connect to the selected Integra dms
Offline:	Disconnect from the selected Integra dms
Upload configuration:	Upload the configuration from the selected Integra dms
Download configuration:	Send current configuration to the selected Integra dms
Configure PC communications:	Enables setting of PC communications

About TE Connectivity

TE Connectivity is a global, \$14 billion company that designs and manufactures over 500,000 products that connect and protect the flow of power and data inside the products that touch every aspect of our lives. Our nearly 100,000 employees partner with customers in virtually every industry – from consumer electronics, energy and healthcare, to automotive, aerospace and communication networks – enabling smarter, faster, better technologies to connect products to possibilities.

WHEREVER ELECTRICITY FLOWS, YOU'LL FIND TE ENERGY



crompton-instruments.com

For email or phone, go to:

crompton-instruments.com

FOR MORE INFORMATION: TE Technical Support Centres

UK +44 1376 509 533

USA: +1 800 327 6996

Australia +61 1300 656 090

Singapore +65 6590 5151

Hong Kong: +852 2790 9609

crompton-instruments.com

© 2015 TE Connectivity Ltd. family of companies. All Rights Reserved. EPP-2410-09/15

TE Connectivity and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and Company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.