



- Direct connection up to 690V line voltage, up to 6,6kV with HV adapter for both single or three phase systems
- Monitoring during both live and standby conditions
- Protection against harmful DC voltage exposure
- "Megger" - safe to 1.4kVDC when aux power is OFF
- Immune to earth capacitance and voltage surges
- For use in land, marine, offshore, sub-sea and ocean floor Installations
- Complies with IMCA D 045 Code of Practice
- Analogue output proportional to meter reading (F-version)

Specifications

Auxiliary Supply:	100-120, 200-240, 380-415 or 440-460VAC, 40-70Hz (Fuse 0.5A)
Optional Voltage:	12-24, 48 or 110VDC (Fuse 2A)
Supply tolerance:	± 10%
Power rating:	1,5VA
Contact rating:	AC: 100VA - 250V/2A max. DC: 50W - 100V/1A max.
Analogue Output:	Up to 20mA, max 500R
F-versions	Up to 10V, min 100kohm (other on request)
Temperature:	-20 to +70°C
Weight:	0.85kgs
Front protection:	IP52 (IP65 optional)

Application


The digitally controlled KPM163Mx series monitors insulation level between a non-grounded (IT) AC mains and its protective earth, regardless of whether the mains is live or non-live (standby) in marine and offshore installations.

IDV MEASURING PRINCIPLE

Insulation is measured between the complete galvanically interconnected AC network and its protective earth. The unit injects a sequentially coded measuring signal to the monitored system. The signal flows to ground via the path of the insulation fault, the level of flow indicates the insulation resistance. The measuring accuracy is not influenced by any normal kind of load attached to the AC network.

An AC or DC auxiliary voltage is required for the unit, if powered from a separate source the network can also be monitored during standby conditions. Only ONE KPM163Mx can be connected to each IT-system. The ohmmeter and the triple-zone status LEDs give at a glance the clear safety message:

- ALARM (red zone)
- WARNING (yellow zone)
- HEALTHY (green zone)



INTELLIGENT SETTING ASSISTANCE

KPM163Mx has a built-in Assistance tool for setting/verification of the trip levels and the analogue output.

When either the **Warning** or **Alarm** potmeter on the rear is operated by user, the meter goes into **Assistance Mode** and meter reading and analogue output will reflect the potmeter setting.

How to set alarm levels:

Firstly adjust potmeter fully clockwise (see that meter goes to the top), then adjust potmeter down to required **Warning** or **Alarm** setpoint. In this mode, the Alarm or Warning LEDs (depending on which potmeter is adjusted) will flash quickly Red/Yellow.



Without any movement of potmeters, the meter will revert to normal Insulation Monitoring Mode after approximately 10 seconds.

How to test analogue output signal:

Adjust any trip level potmeter to activate Assistance Mode. **Example:** On a 4-20mA output, adjust potmeter fully anti clockwise for 4mA and fully clockwise for 20mA.

NOTE:

The standard Insulation Guards KPM161x and KPM163x are protected against sporadic AC and DC voltage surges imposed on the monitored AC network. Exposure to enduring high energy DC voltage (reported to be up to several hundred volts with positive or negative polarity) will instantaneously cause the meter to read false insulation value and may destroy the unit.

General

HIGH ENERGY DC VOLTAGE IN YOUR AC MAINS, AN UNKNOWN AND NEGLECTED PROBLEM

Experience has confirmed that **full cycle** half-wave and **partial cycle** full-wave rectifier/regulator loads, inverter asymmetrical phases output or a semiconductor failure in heavy power rectifiers/inverters may impose high energy DC voltage on the AC supply line voltages. Intermittent or ENDURING imposed DC voltage is reported to be up to several hundred volts with positive or negative polarity relative to protective earth.

This DC voltage will distort insulation measurements, and may cause breakdown of protective guards. The uncontrolled DC energy can cause functional problems by saturating magnetic cores and influence performance of current and voltage transformers, reactors, motors, regenerative drives, generators and regulators. It is also a fact that this serious malfunction normally remains undetected and unknown to the crew. The M-variant therefore includes a unique DC voltage detection function with an alarm output.

When a "foreign" positive DC voltage exceeding 17V or a negative DC voltage exceeding 3V are detected on the monitored AC supply the DC detection function will within 20 seconds disable the insulation measuring function to avoid false readings, isolate the unit input, activate LED "DC EXPOSURE" and trip relay 3. In this mode unit will sustain continuous high-energy exposure up to +/- 800VDC. The "pathfinder" function identifies polarity of imposed DC. At 10 minutes intervals the unit senses if DC is still present and will reset automatically and restore normal operation when DC exposure ends.

To detect presence of harmful DC voltage connect a voltmeter between any AC supply line voltage and protective earth, and set the meter function switch to AC and DC alternately.

Description

KPM163M & KPM163MF - KPM163MG & KPM163MGF


This unit is used for marine, ROV and offshore installations. Start of monitoring function is delayed when auxiliary power is switched on (default 10 secs delay).

The unit has minimum 150 mS detection time for any insulation fault.

Direct connection up to 690V line voltage. Up to 6,6kV via HV adaptor CH163x or AN6,6 series.

Model	Latch	Output	Fail Safe	Adjustments	Trip level	Delay
KPM163M	-	-	X	WARNING:	0-10MΩ	0-30secs
KPM163MF	-	X	X	ALARM:	0-10MΩ	0,1-3secs
KPM163MG*	X	-	X			
KPM163MGF*	X	X	X			

PATHFINDER FUNCTION
The pathfinder indicates polarity of DC exposure by the flashing pattern of lamp DC EXPOSURE (Positive polarity gives steady light and flashing for negative polarity).




Coloured sectors show recommended areas of settings:
 - Red - Indicates alarm trip zone
 - Yellow - Indicates warning trip zone
 - Green - Indicates healthy zone

Scale range: 0-10MΩ - ∞ (>60MΩ)


	Warning	Alarm	DC Exposure Alarm	Fail Safe	Latch
R1	✓				
R2		✓		✓	*✓
R3			✓		

Output diagram

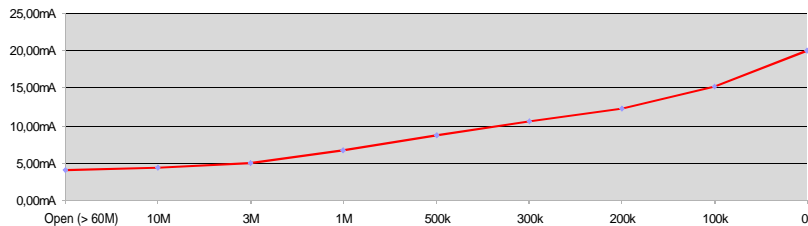

Output table (example for 4-20mA)

Value (scale)	mA output
0kΩ	20.00mA
100kΩ	15.18mA
200kΩ	12.30mA
300kΩ	10.59mA
500kΩ	8.67mA
1MΩ	6.69mA
3MΩ	4.98mA
10MΩ	4.28mA
Open (60MΩ)	4.00mA



Description

KPM163M2 & KPM163MF2 - KPM163MG2 & KPM163MGF2


This unit is used for marine, ROV and offshore installations. Start of monitoring function is delayed when auxiliary power is switched on (default 10 secs delay).

The unit has minimum 150 mS detection time for any insulation fault.

Direct connection up to 690V line voltage. Up to 6,6kV via HV adaptor CH163x or AN6,6 series.

Model	Latch	Output	Fail Safe	Adjustments	Trip level	Delay
KPM163M2	-	-	X	WARNING:	0-10MΩ	0-30secs
KPM163MF2	-	X	X	ALARM:	0-10MΩ	0,1-3secs
KPM163MG2*	X	-	X			
KPM163MGF2*	X	X	X			

PATHFINDER FUNCTION
The pathfinder indicates polarity of DC exposure by the flashing pattern of lamp DC EXPOSURE (Positive polarity gives steady light and flashing for negative polarity).




Coloured sectors show recommended areas of settings:
 - Red - Indicates alarm trip zone
 - Yellow - Indicates warning trip zone
 - Green - Indicates healthy zone

Scale range: 0-10MΩ - ∞ (>60MΩ)


	Warning	Alarm	DC Exposure Alarm	Fail Safe	Latch
R1	✓				
R2		✓		✓	*✓
R3			✓		

Output diagram

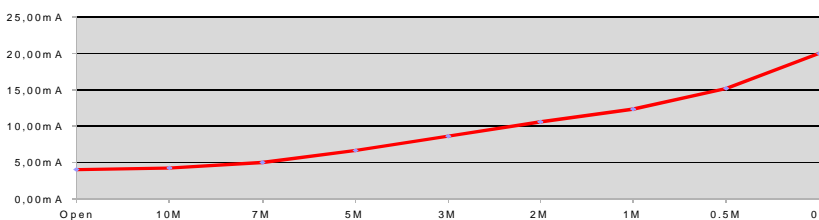

Output table (example for 4-20mA)


Value (scale)	mA output
0kΩ	20.00mA
0.5MΩ	15.18mA
1MΩ	12.30mA
2MΩ	10.59mA
3MΩ	8.67mA
5MΩ	6.69mA
7MΩ	4.98mA
10MΩ	4.28mA
Open (60MΩ)	4.00mA




High Voltage Adaptors up to 6,6kVAC for KPM163Mx series




CH163/1,4 up to 1.4kVAC
(for KPM163Mx series)



CH163/3,6 up to 3.6kVAC
(for KPM163Mx series)



CH163/5 up to 5kVAC
(for KPM163Mx series)




AN6,6 up to 6,6kVAC
(for KPM163Mx series)

The MEGAON policy is one of continuous improvement, consequently equipment supplied may vary in detail from this publication.



Connection

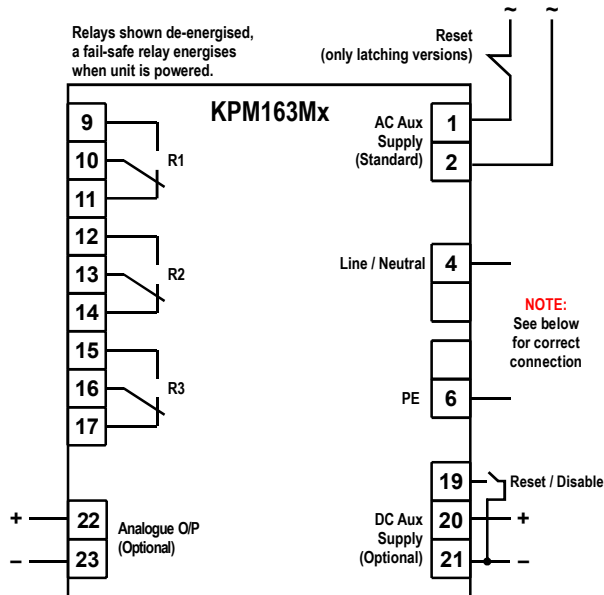

Outputs

The unit has C/O relay outputs for insulation **Warning** and **Alarm** and **DC Exposure** alarm. The insulation alarm relay is fail to safety configured. The trip LED flashes when the set trip level is passed, the relay trips when the delay has elapsed. The timer resets if the fault is removed during countdown. Trip levels and delays are settable on unit rear.

KPM163MF, KPM163MF2, KPM163MGF and KPM163MGF2 have an analogue output proportional to meter reading. (Special outputs are available on request)

Add suffix from table below to type designation to specify output required:

O/P1	0 - 10mA	O/P6	N/A
O/P2	0 - 20mA	O/P7	N/A
O/P3	4 - 20mA	O/P8	0 - 10VDC
O/P4	N/A	O/P9	N/A
O/P5	N/A	O/P10	N/A


Reset / Paralleling Disable Function

KPM163Mx has a built-in disable function. When connecting two or more IT-networks together **only one unit** can be active, the other(s) must be disabled. When unit is disabled the power led will flash every 2 seconds to indicate that unit is inactive.

Use a potential free contact on terminal 19 & 21 to activate the disable function (after 2 secs). When activated the measuring input terminal 4 will be internally disconnected.

A pulse (60mS - 2 secs) on terminal 19 & 21 will only reset any latching alarm.

Dimensions

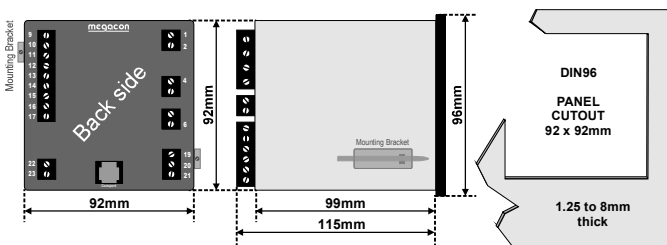



SAFETY

When a voltage adapter (CHx) is used the signal to terminals 4 and 6 on KPM163Mx is limited to a safe level, avoiding any dangerous voltage exposure to personnel.

The unit meets EN 61010-1 Cat. III, Pollution degree 2 and the relevant environmental and EMC tests specified in EN 61326-2-4 to comply with the requirements of the major Classification Societies.

The KPM163Mx range is designed to comply with specification IMCAD 045 "Code of Practice for the Safe Use of Electricity Under Water" issued by IMCA.

Connection

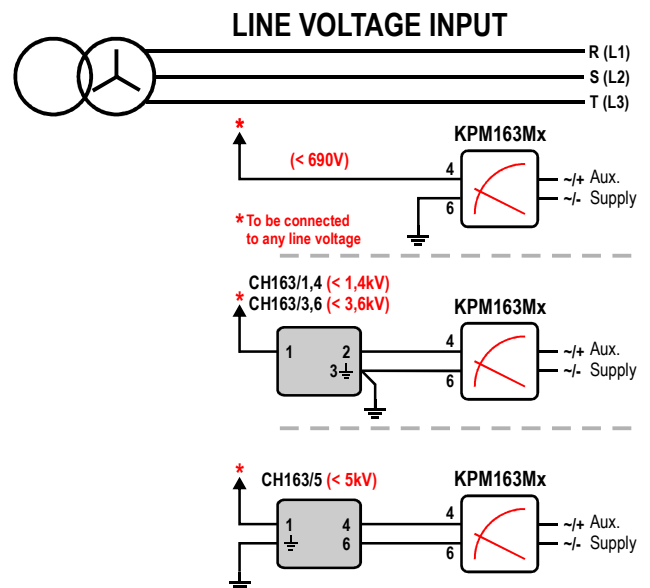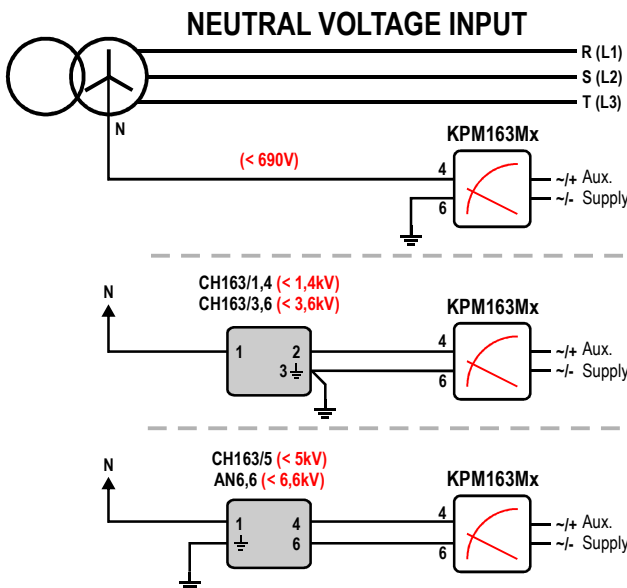

! The instrument will detect earth fault on all phases independent of which phase is connected to terminal 4.

The MEGAICON policy is one of continuous improvement, consequently equipment supplied may vary in detail from this publication.

ORDERING EXAMPLE:

Type: KPM163MF
 Aux. Supply: 200-240VAC
 Network Voltage: 3,6kVAC
 Analogue O/P: (O/P3) 4-20mA
 Range: 0-10Mohm

